3 Work Order

3.1 Work Order Overview

Work Orders are used to identify, plan, schedule, execute and track the work that is performed at Locations and/or on Assets throughout organization. Initially, a work order is a request for work to be performed. Once completed, a work order is a record of activities performed that make up the history of the Locations or Assets.

Work order record contains all information about a work, from work plan until work result. With a work order, a work can be tracked about its current status, all resource required, cost prediction, all resource used, and all task performed in the work.

3.2 Work Order Tracking Application

You use the **Work Order Tracking** application to plan, review and approve work orders for assets and locations. When you create a work order in Maximo, you initiate the maintenance process and create a historical record of work being performed. You can create work orders in several Maximo applications.

The **Work Order Tracking** application contains the following tabs:

- **List**: To search work orders.
- **Work Order**: To create, view and modify work order; view PM and scheduling information; see which job plan and safety plan are applied; view the origination work order for a follow-up work order; identify the failure hierarchy for the asset or location.
- **Plans:** To enter, view and modify job tasks and labor, material, services and tool requirements for the work plan.
- **Related Records**: to view, add and delete related work orders, and tickets; to view follow-up records for the current record.
- **Actuals**: to enter, view and modify actual work order start and finish times labor hours and costs, material quantities, locations, costs and tool quantities, hours and cost.
- **Safety Plan**: To enter, view and modify safety information on work order.
- **Failure Reporting**: to report asset and location failures to help identify breakdown patterns or trends.
- **Log**: to view and create work log and communication entries about the current record.

3.2.1 Materials Planning

Below are step by step to create Materials Planning:

<table>
<tr><th>Step</th><th>Action</th></tr>
<tr><td>1. Go to Work Orders Tracking Application by click (GoTo) – Work Orders – Work Order Tracking.</td><td>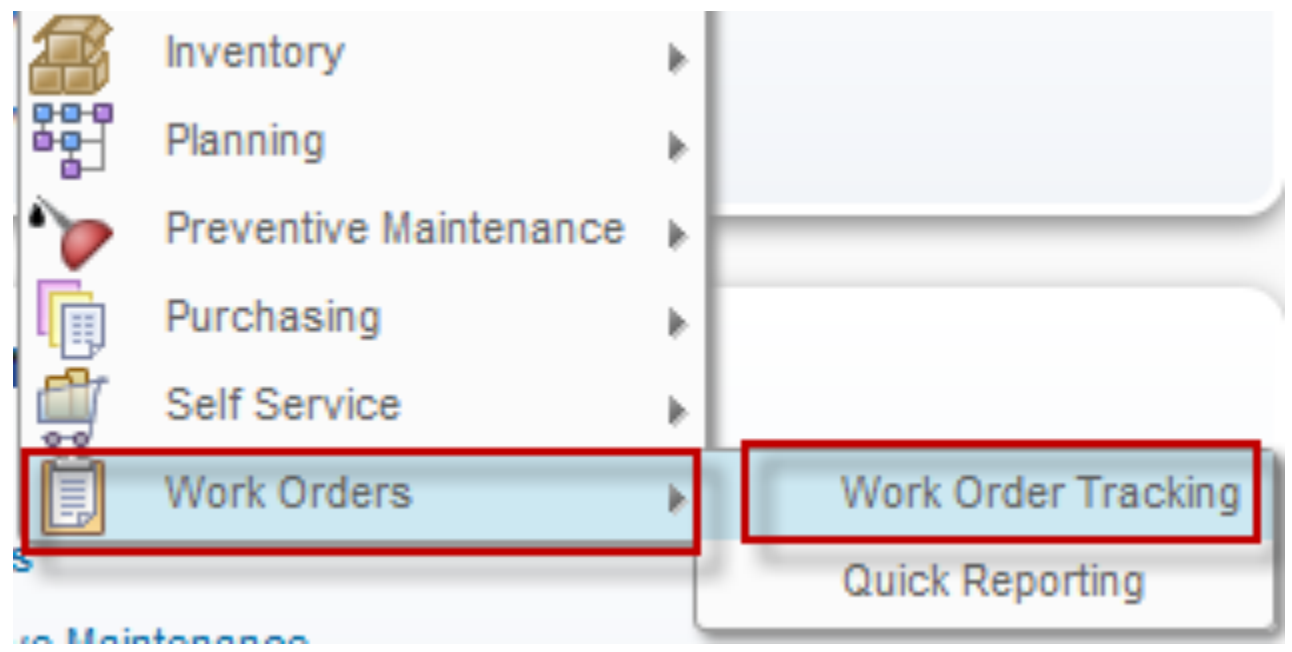
</td></tr>
<tr><td colspan="2">2a. Work Order number is autonumber.
2b. Input Work Order description.
2c. Location automatically fill when selecting asset.
2d. Select Asset.
2e. Select Work Type.
2f. Click Save.
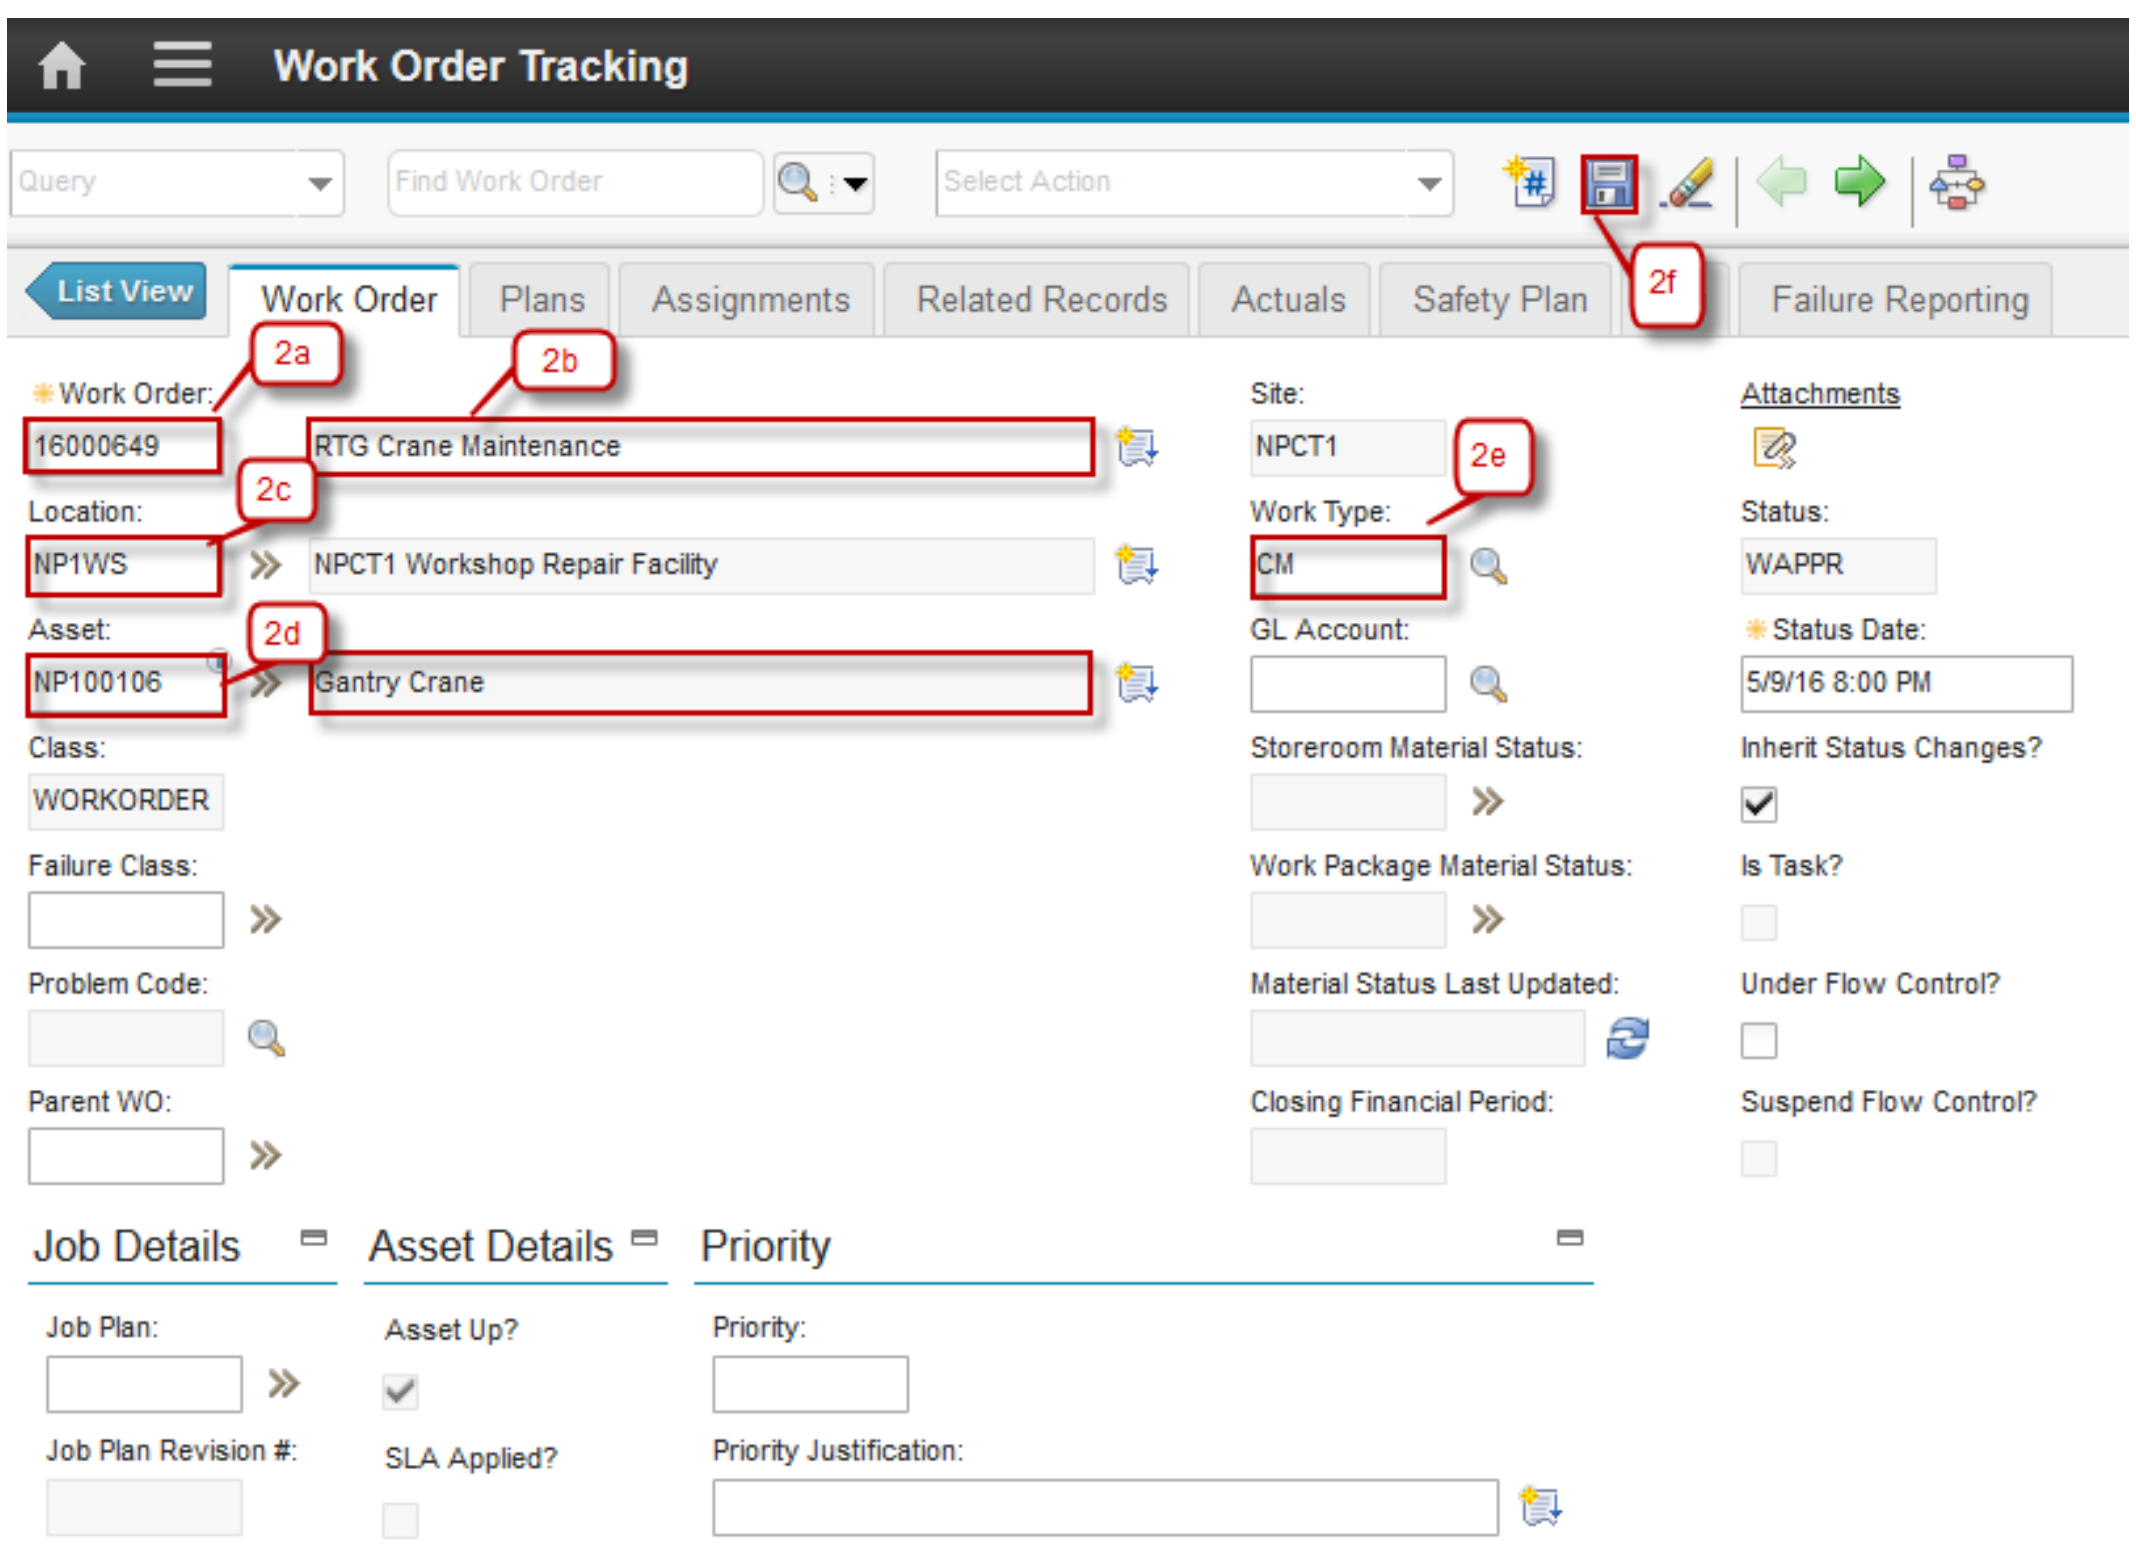
</td></tr>
</table>

3. Move to Tab **Plan**. Go to Tab **Material**.

3a. Click **New Row**

3b. Select the Item and description automatically fill.

3c. Default Line Type is Item.

3d. Input Quantity, default value of Quantity is 1.00

3e. Unit Cost Item, default value of unit cost is 0.00

3f. Select Storeroom where the Item is stored.

3g. Storeroom Site automatically fill when storeroom filled.

3h. Reservation Type automatically fill with default 'AUTOMATIC'.

3i. Required Date automatically with current date.

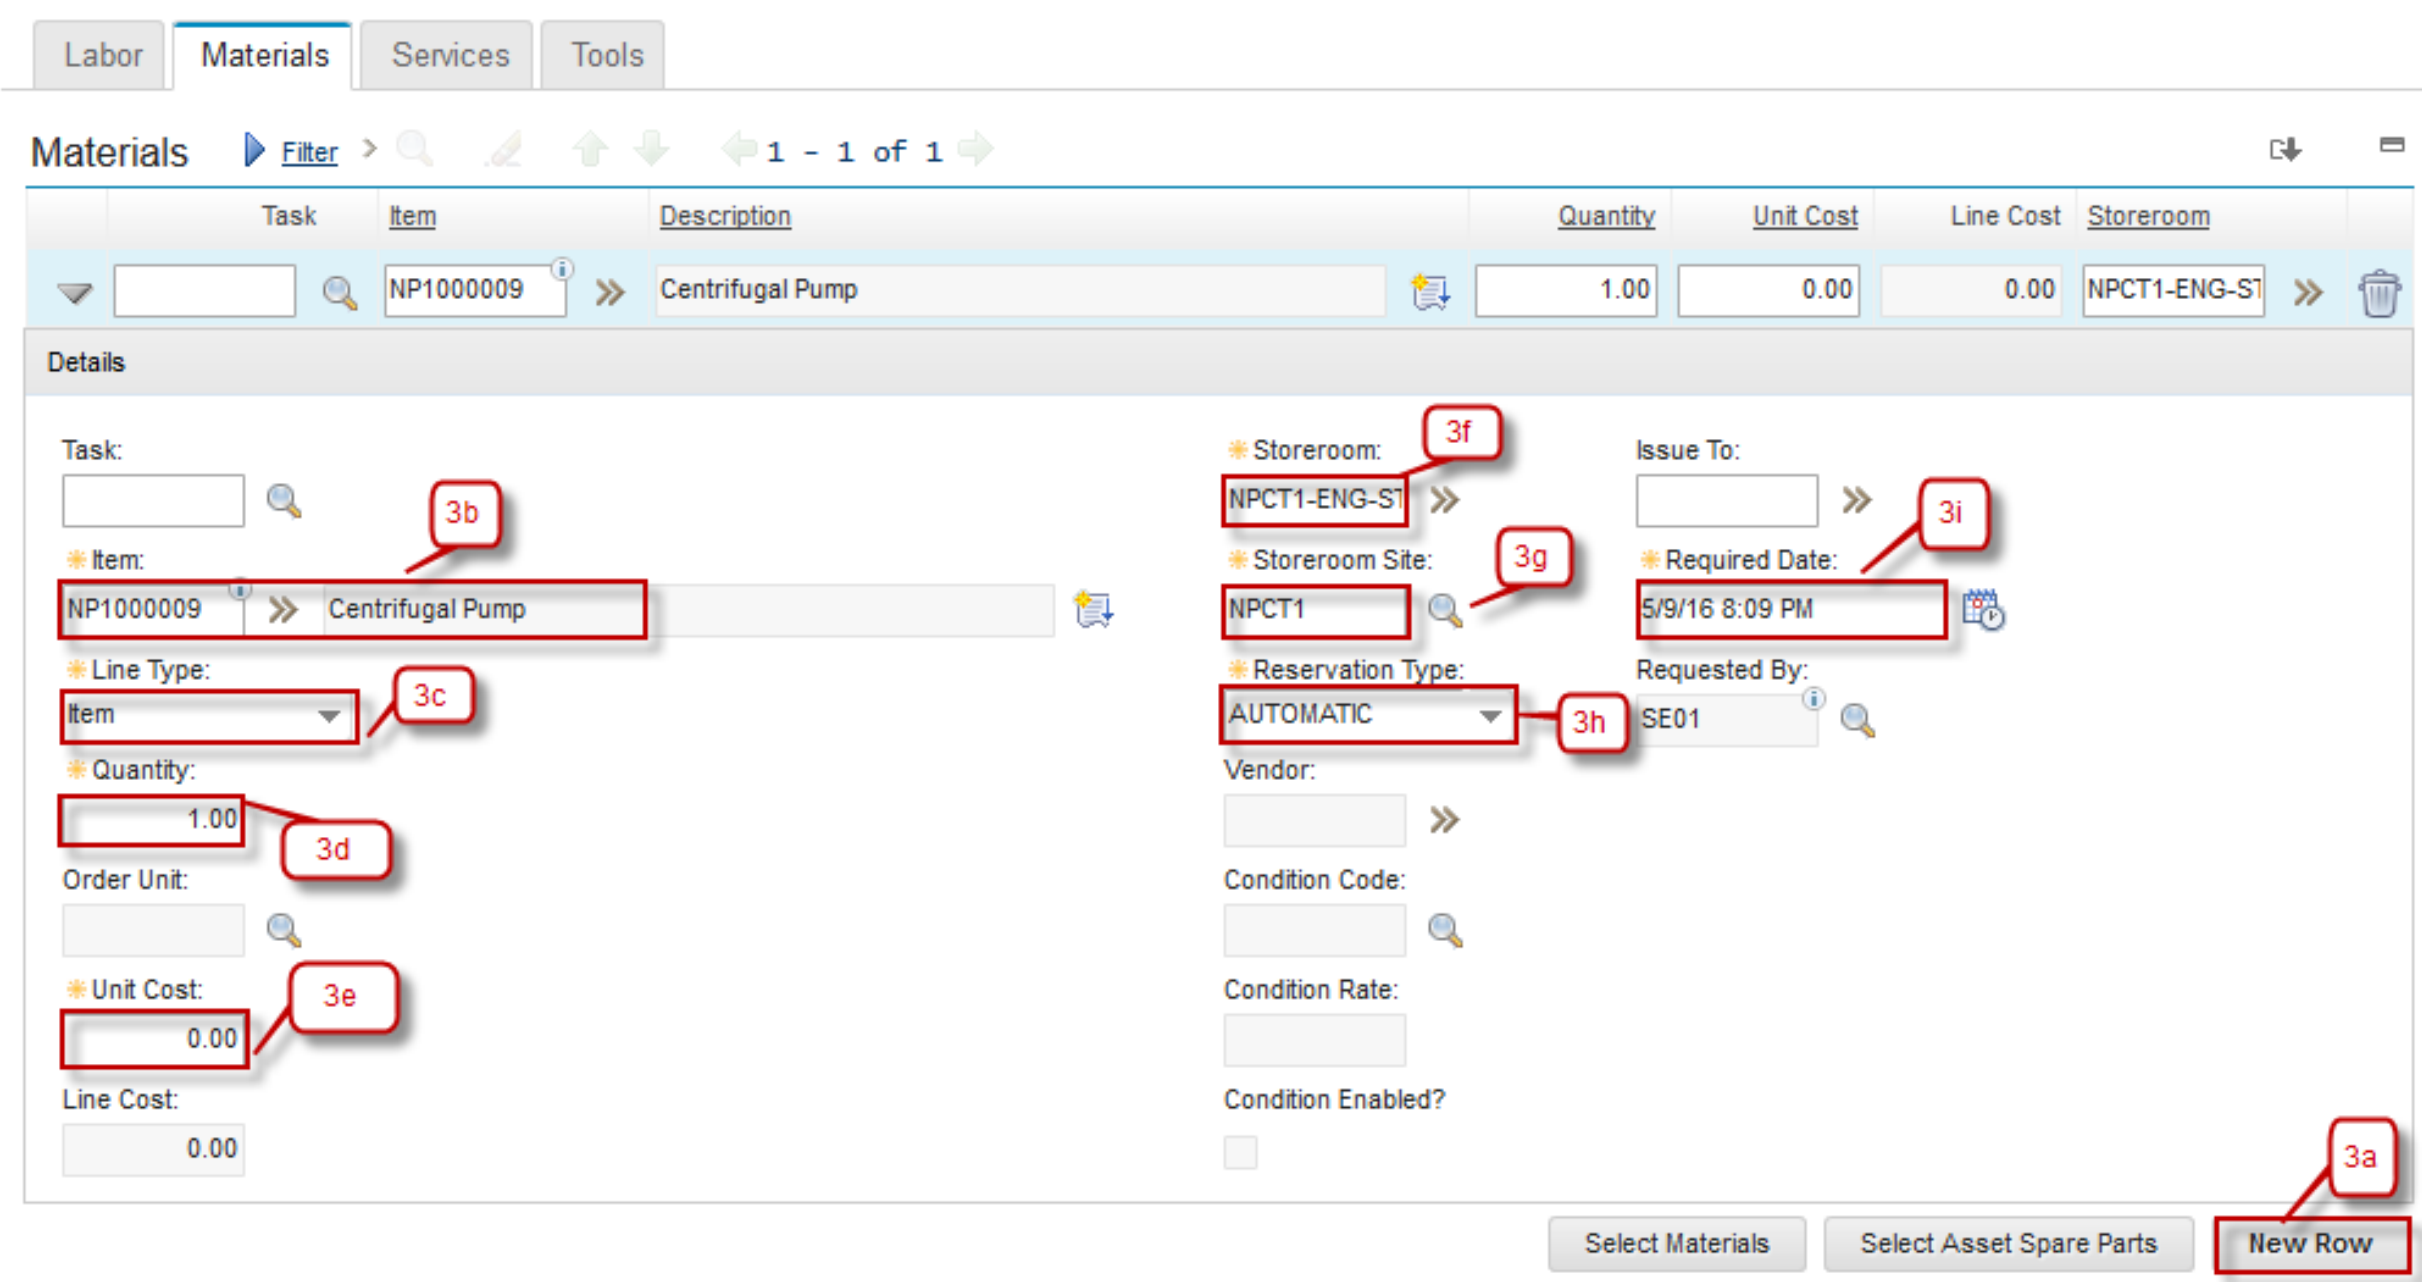

3.2.2 Labor Planning

Below are step by step to create Labor Planning:

Step	Action

1. Move to Tab **Plan**. Go to Tab **Labor**.

1a. Click **New Row**

1b. If Labor from outside when choose the Craft, field Skill Level, Vendor, Labor Contract and Rate will be automatically fill in accordance with the data on the labor contract.

1c. Input Quantity of Labor.

1d. Input Duration of Labor.

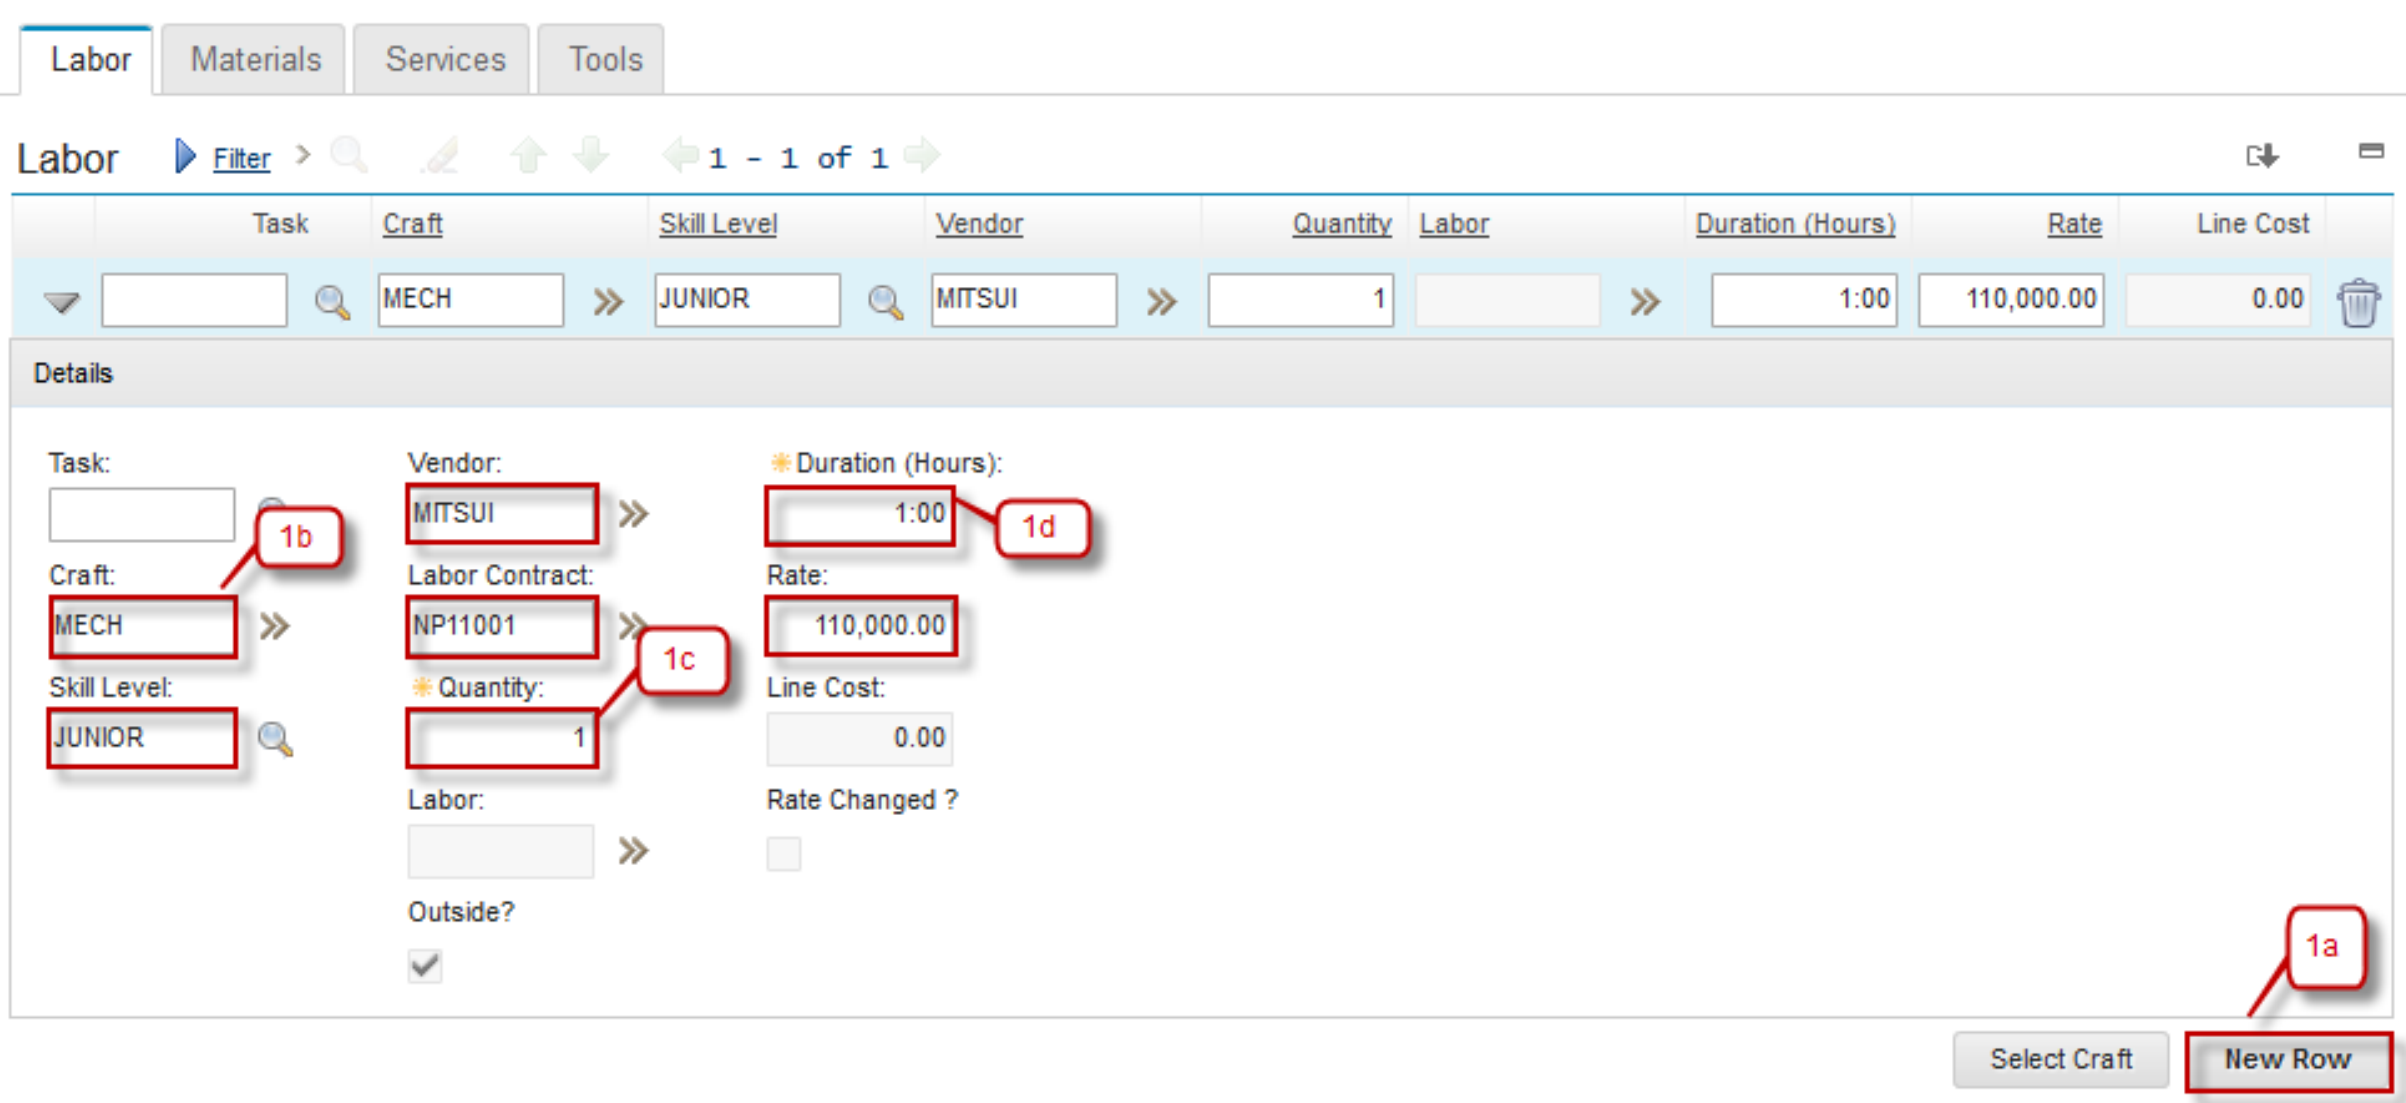

3.2.3 Services Planning

Below are step by step to create Services Planning:

Step	Action

1. Move to Tab **Plan**. Go to Tab **Services**.

1a. Click **New Row**

1b. Select Line Type Service or Standard Service.

- If Line Type is Service, field Description is required (mandatory).
- If Line Type is Standard Service, choose Service using button »

1c. Select Service will be used.

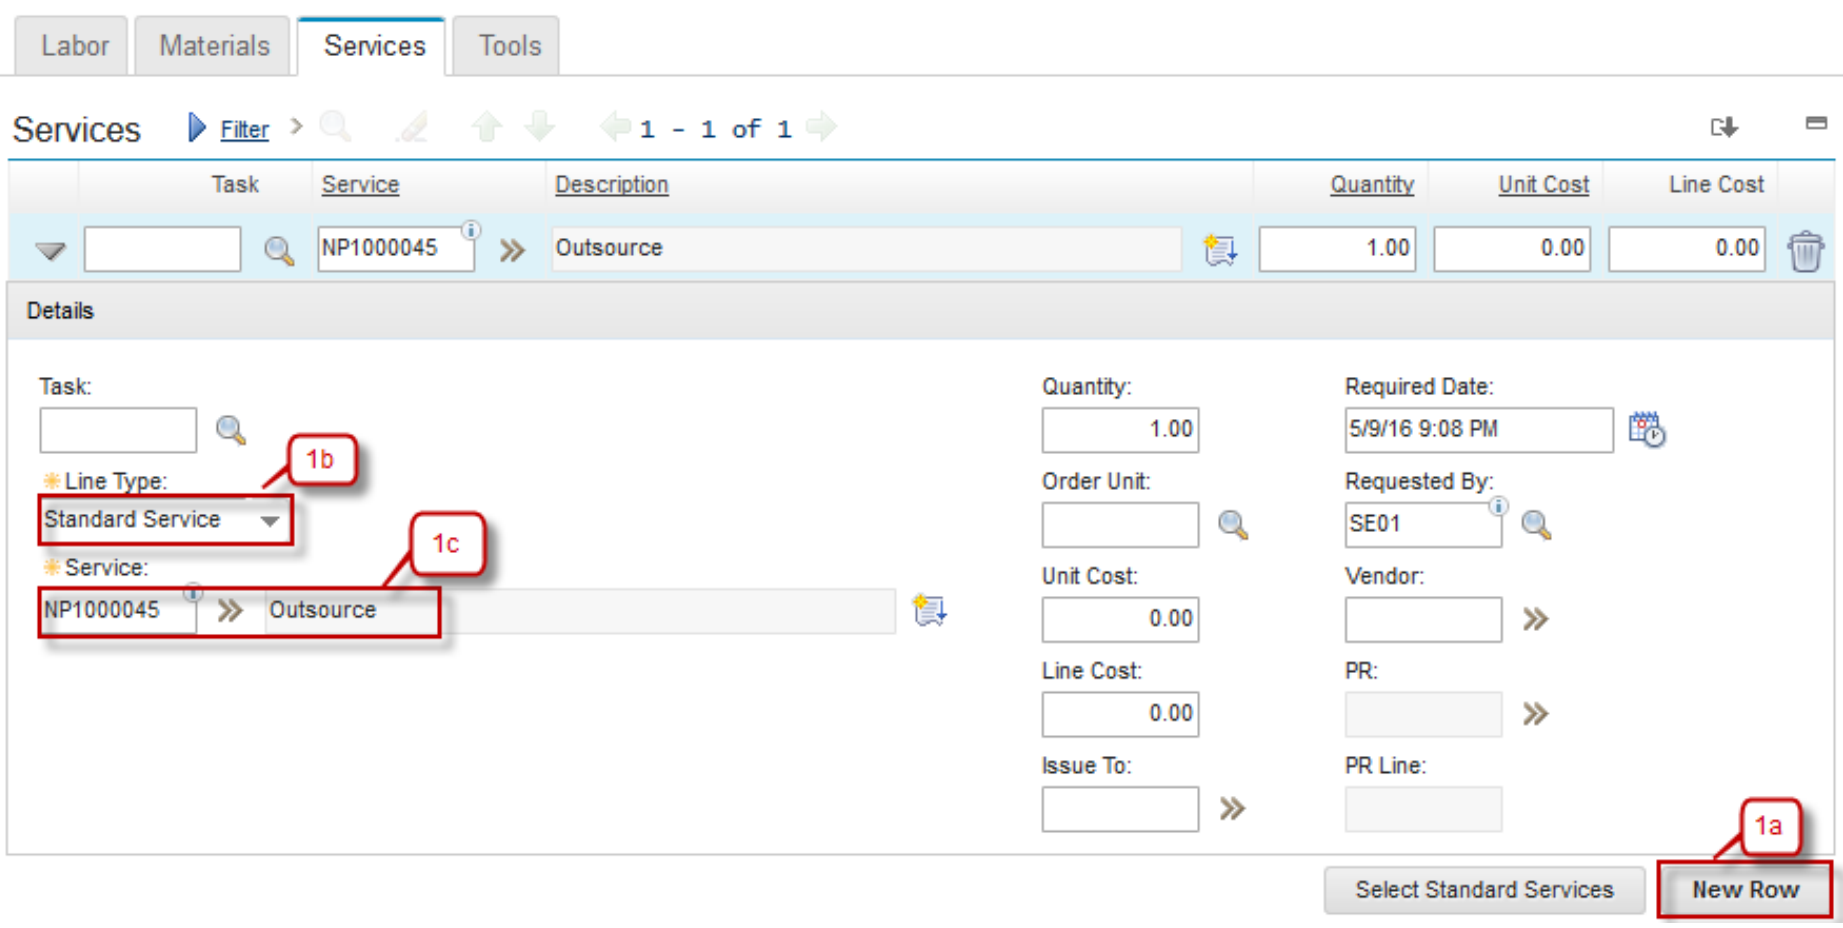

3.2.4 Tools Planning

Below are step by step to create Tools Planning:

Step	Action

1. Move to Tab **Plan**. Go to Tab **Tools**.

1a. Click **New Row**

1b. Select Tool using button »

1c. Input Quantity of Tool.

1d. Input Tool Hours.

1e. Input Rate of Tool.

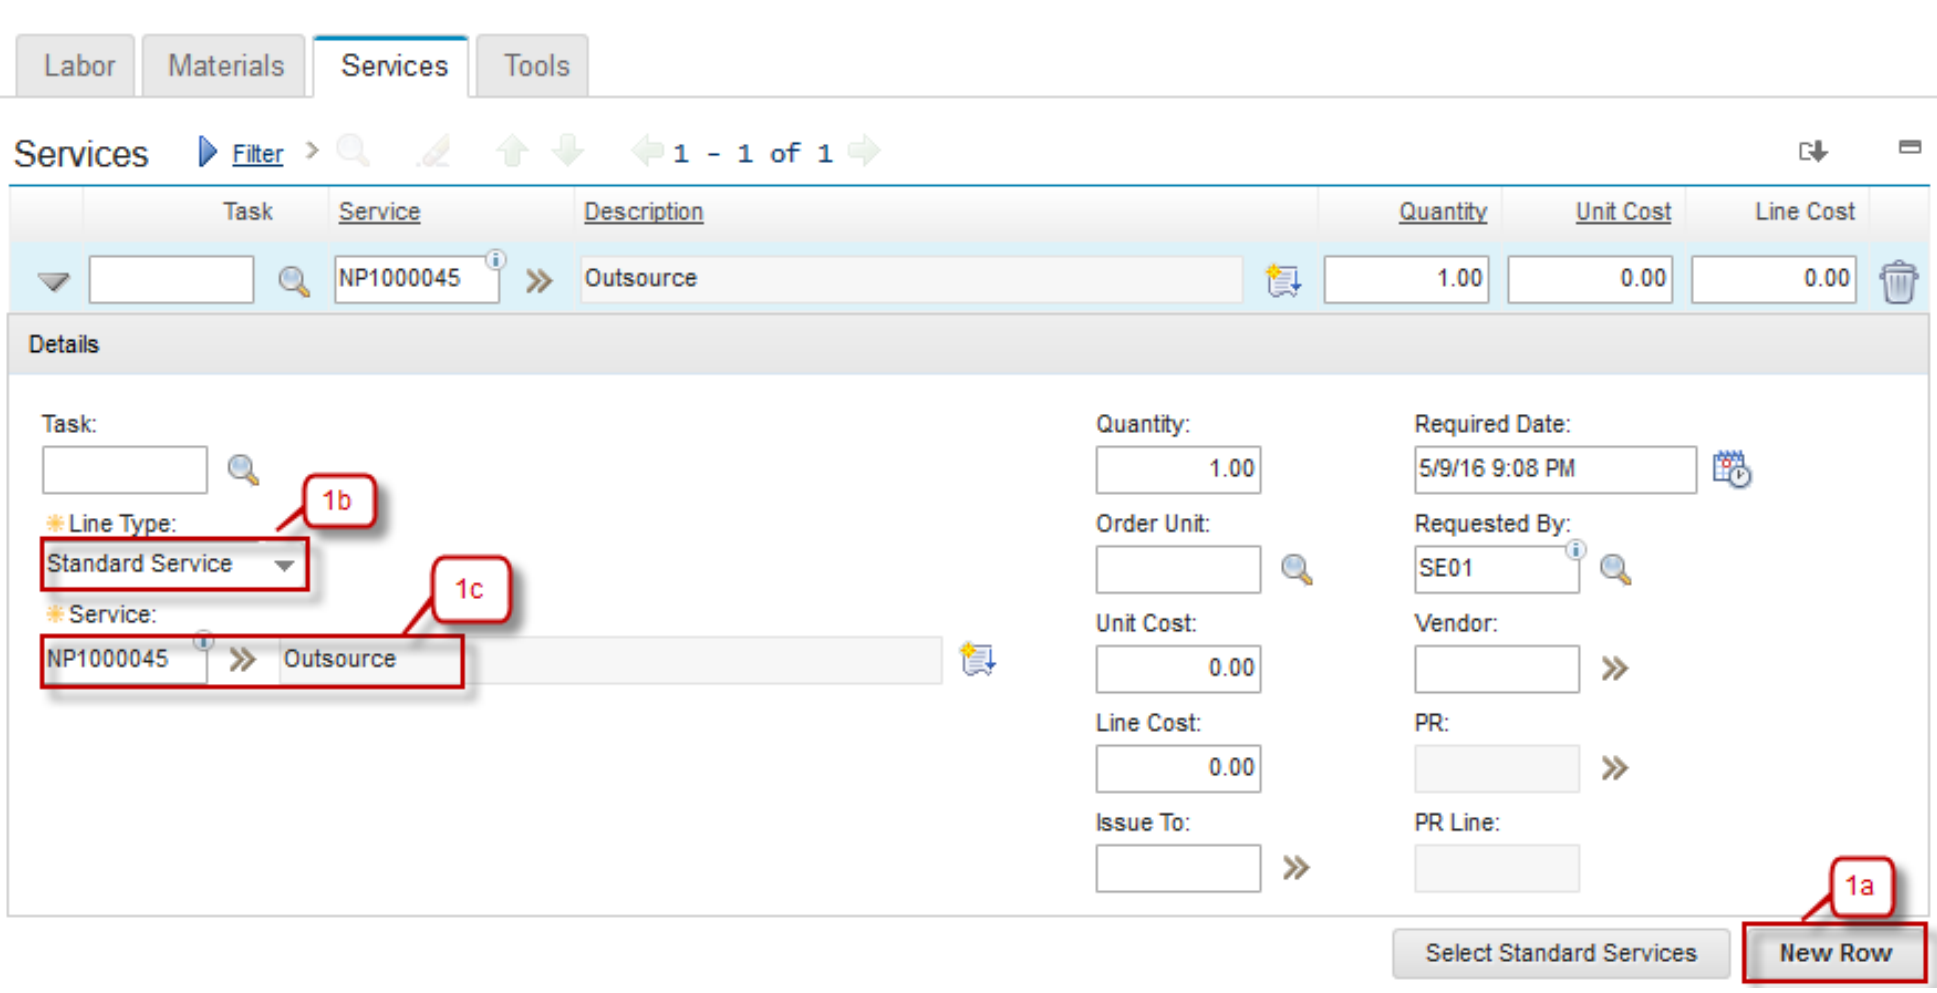

3.2.5 Rework Work Order

Sometimes a rework need to be performed to a work that already finished, maybe because there is an unfinished work or the result is not as expected. In EMS, the rework should be marked, to measure the maintenance performance. Below are steps to marks a rework work order:

Step	Action
1. Select one of Work Order to be set into a rework work order. 1a. Check box **Is Rework** checked 1b. Select the **Originating Record** that will be used as Work Order originator.	

3.3 Quick Reporting Application

Quick Reporting application is used to report a work that has been performed without any prior work plan. It is usually used for emergency work that should be performed immediately. So, when the work is finished, user should report the work result via **Quick Reporting** application. A work order will be created for the work result that has been reported. The different between creating a work order in **Work Order Tracking** application against **Quick Reporting** application is that work order created **Work Order Tracking** application contains planning information, while work order from **Quick Reporting** application is not.

Below is **Quick Reporting** application accessibility.

1	From **Work Orders** – **Quick Reporting** 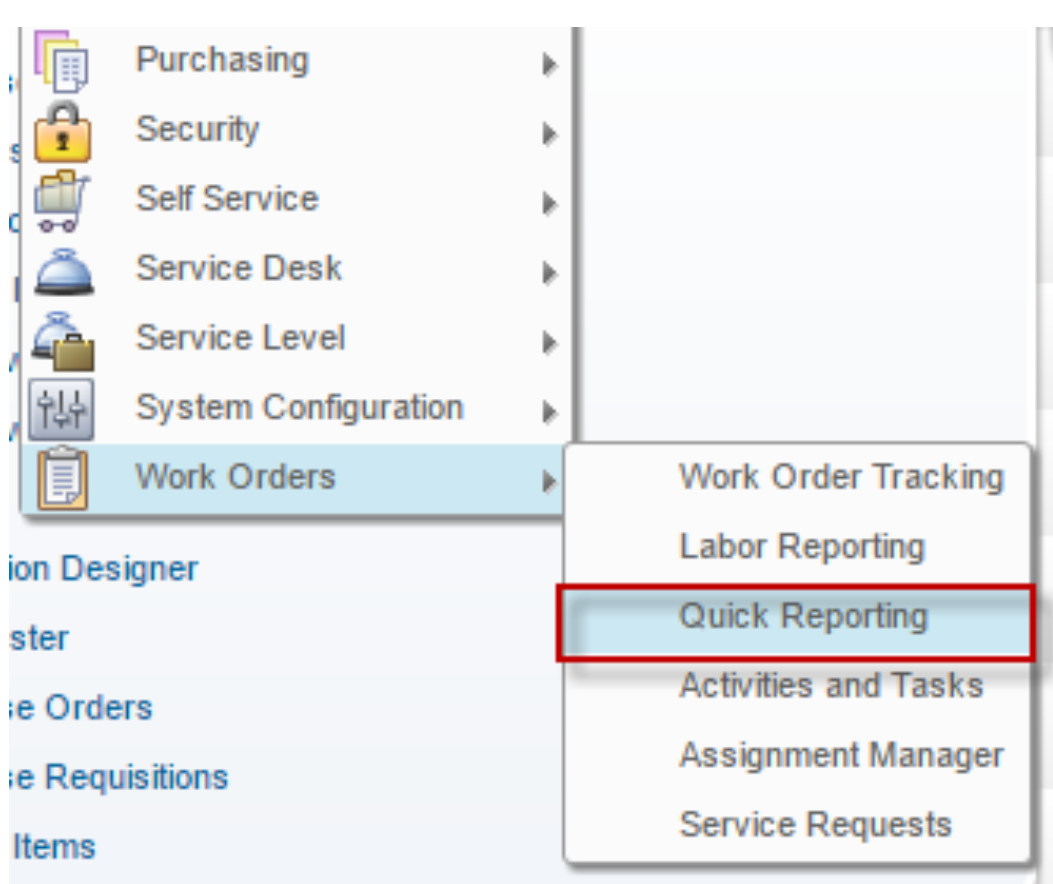

2	Show listed work order 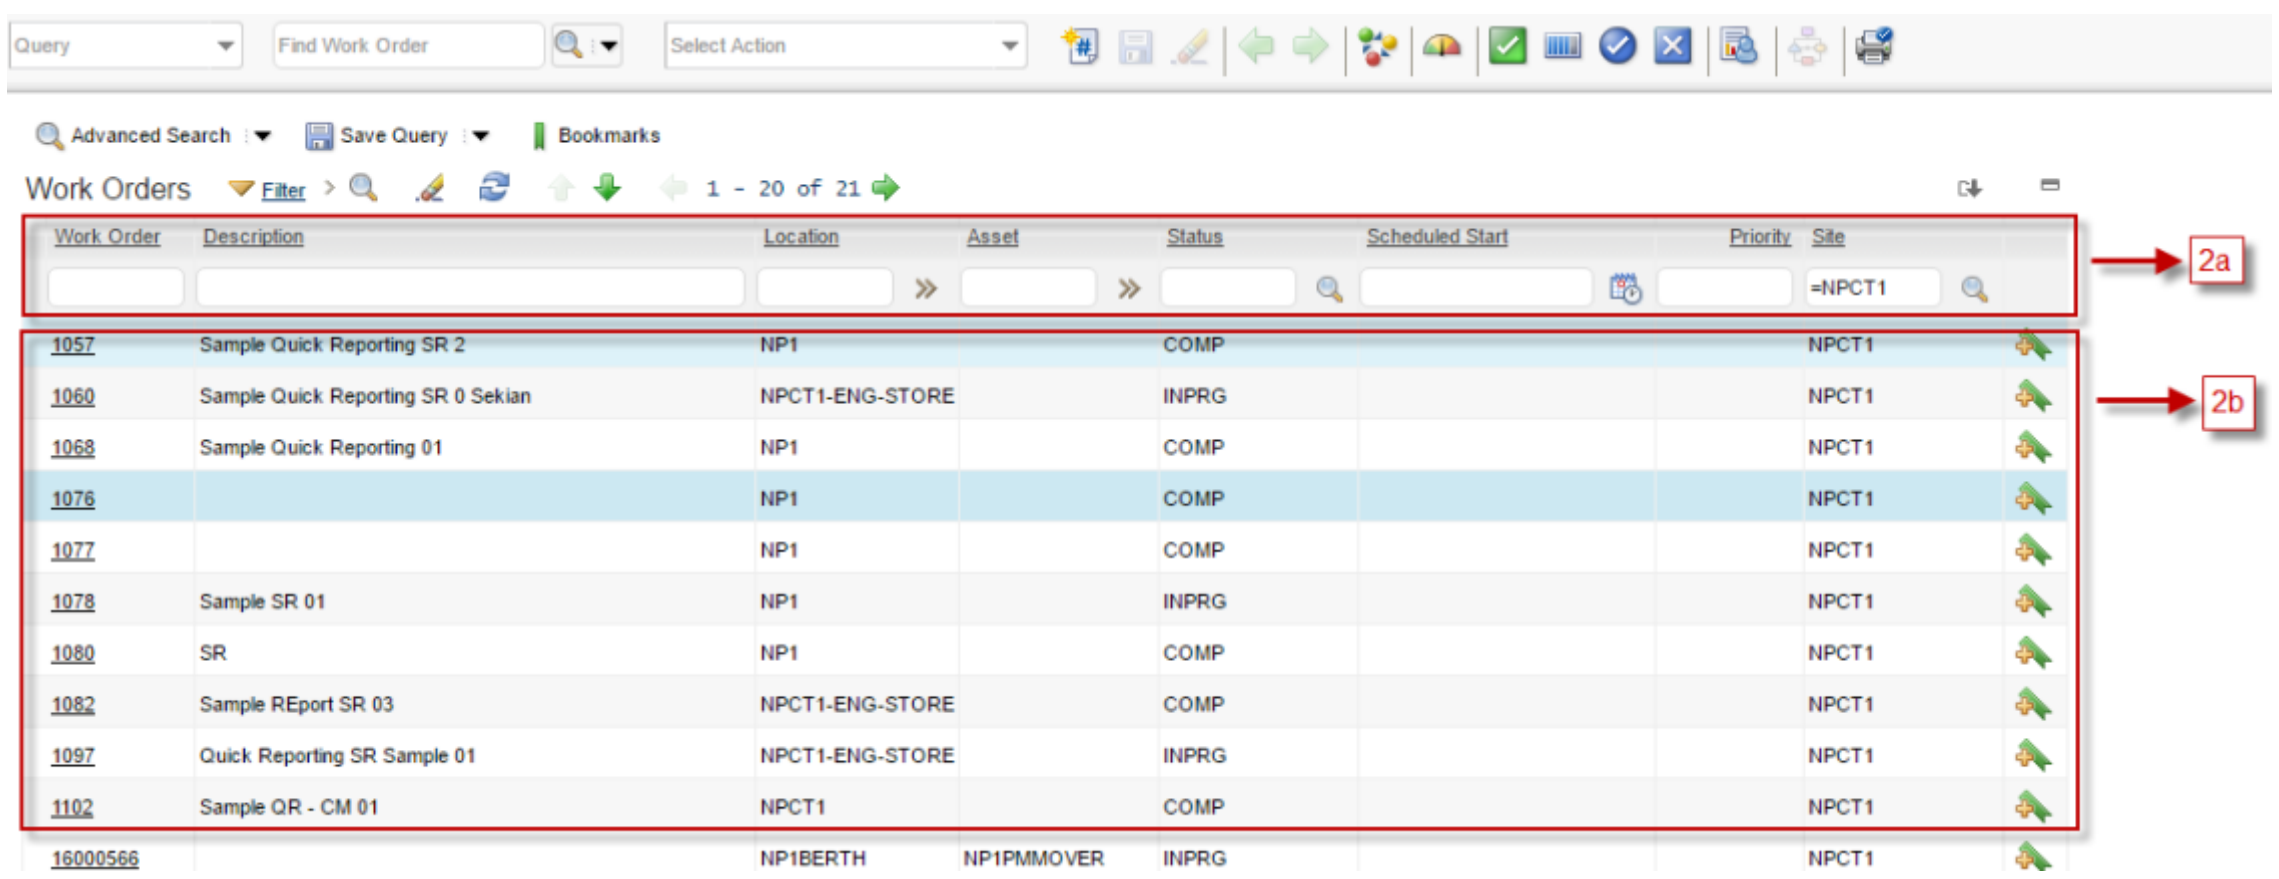 2.a Filter work order by **Work Order** number, **Description**, **Location**, **Asset**, **Status**, **Scheduled Start**, **Priority** and **Site** 2.b **Listed** all work orders
3	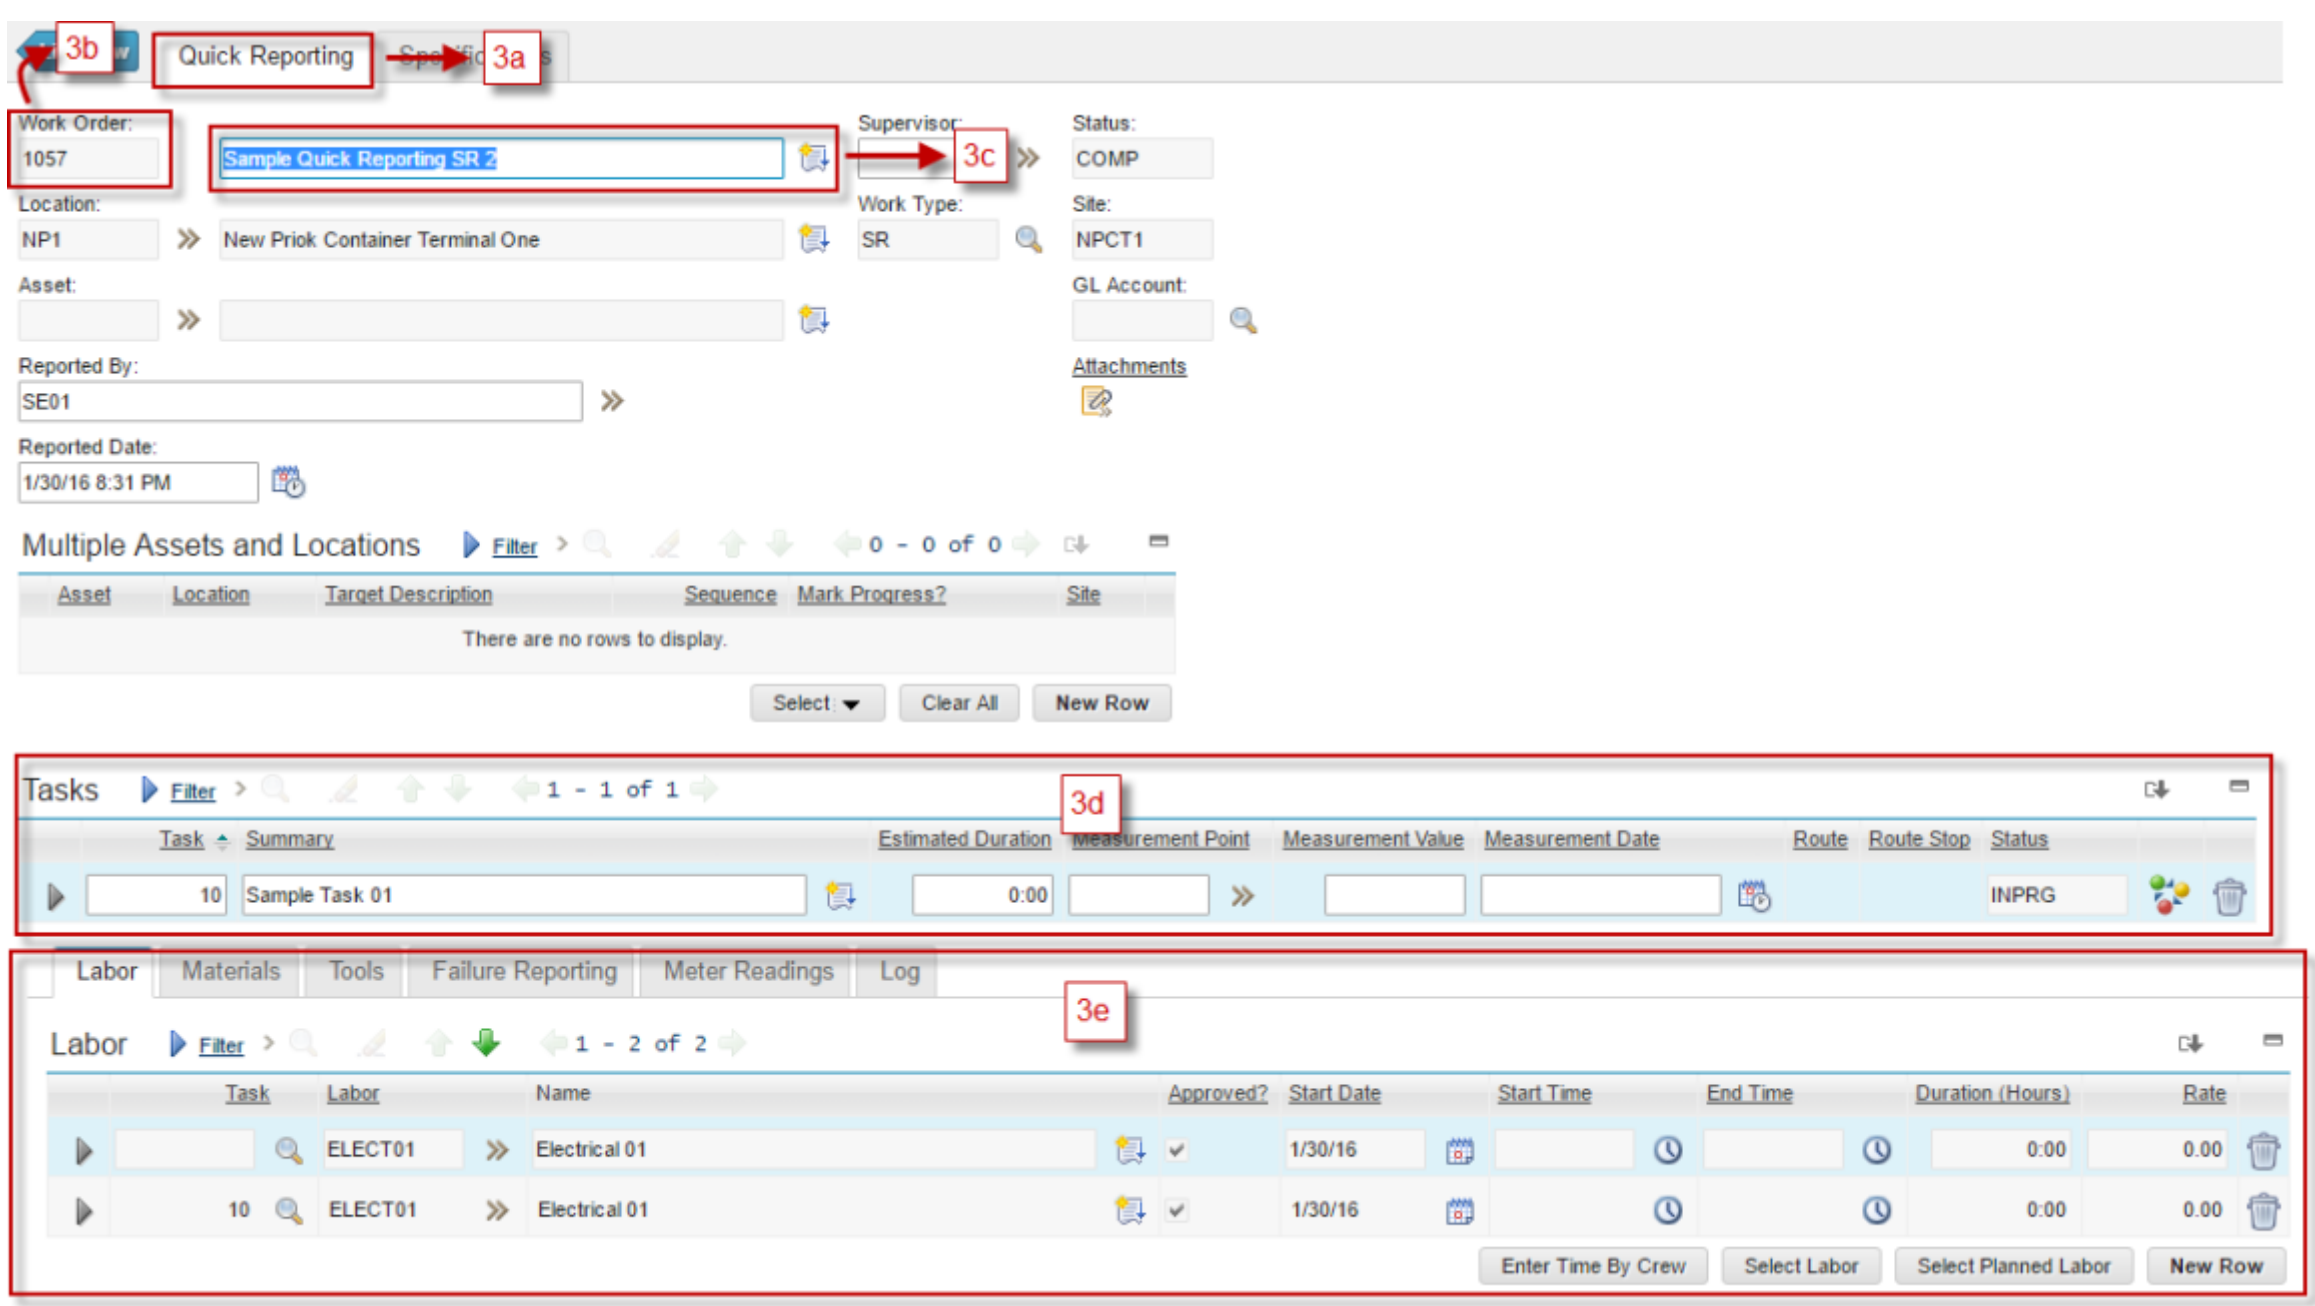 3.a **Quick Reporting** Tab, view update and detail of the work order. 3.b Information about work Order number 3.c Information about description of the work order. 3.d All Tasks listed in the work order. 3.e All Listed Labor, Material, Tools, Failure Reporting and Log in the quick reporting